PaintScope™


Advantage Offices

Project Totals

Total Paint Area	-	**21,010.6 SF**
Paint 1	-	10,904.9 SF
Paint 2	-	7,830.8 SF
Outdoor Ceiling	-	2,275.0 SF
Total Trim Length	-	2,479.5 LF
Window Trim	-	1,833.0 LF
Door Trim	-	53.5 LF
Misc Trim	-	593.0 LF
# of Windows	-	52
# of Doors	-	3



North

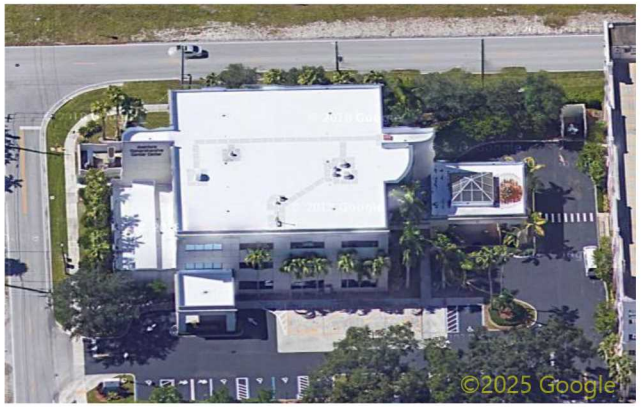

East



South



West

Waste Factor (Total Paint Area)


4%	-	21,851.0 SF	7%	-	22,481.3 SF	10%	-	23,111.7 SF	13%	-	23,742.0 SF
5%	-	22,061.1 SF	8%	-	22,691.4 SF	11%	-	23,321.8 SF	14%	-	23,952.1 SF
6%	-	22,271.2 SF	9%	-	22,901.6 SF	12%	-	23,531.9 SF	15%	-	24,162.2 SF

THIS REPORT IS FOR ESTIMATION PURPOSES ONLY. VERIFY ALL DIMENSIONS AND TOTALS BEFORE PURCHASING MATERIALS.
THIS REPORT IS THE PROPERTY OF SCOPE TECHNOLOGIES, INC. AND MAY NOT BE REPRODUCED WITHOUT WRITTEN CONSENT.

ScopeTechnologies

North Elevation Analysis - Structure 1
Advantage Offices



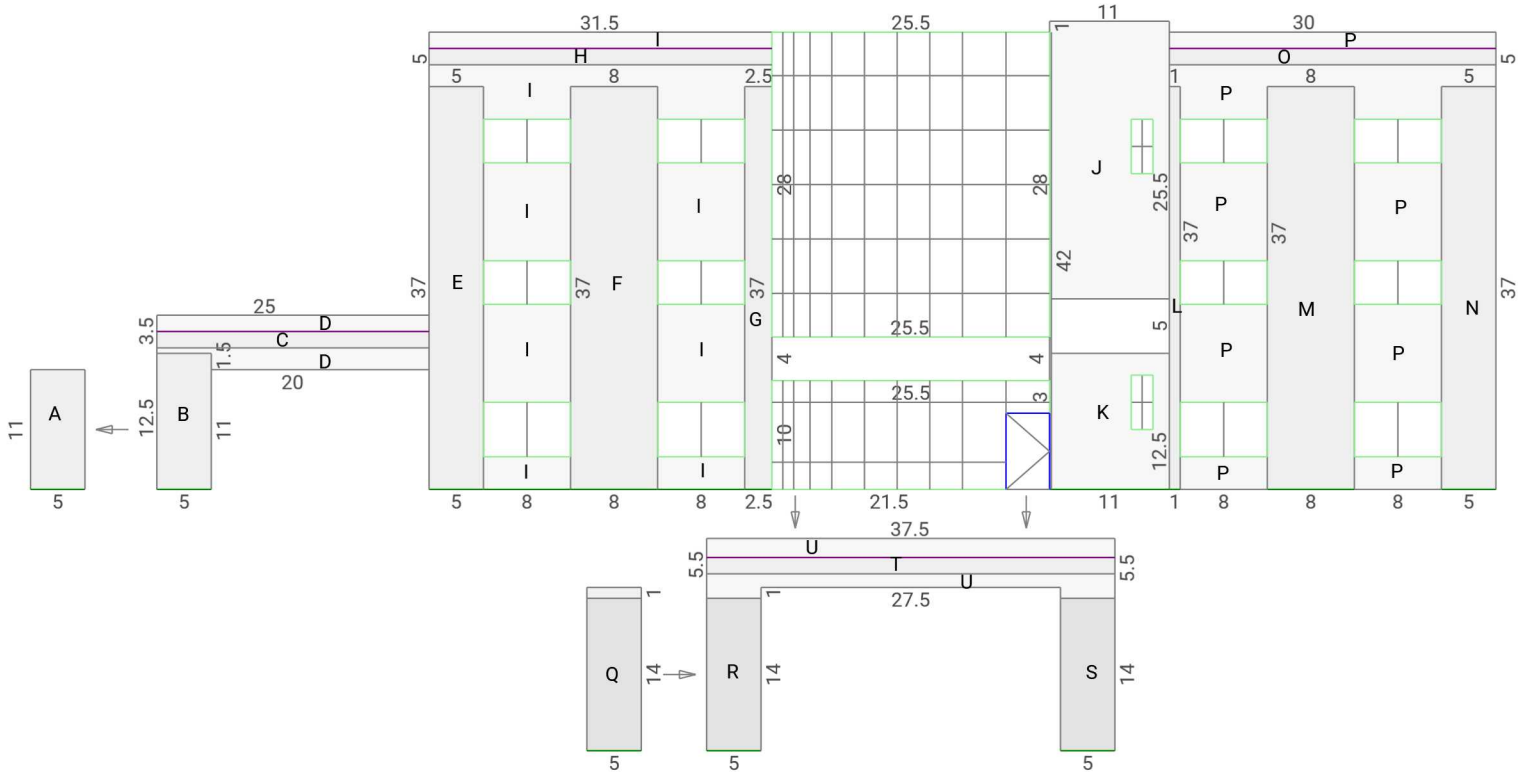

Plane	Area(sf)	Type
A	55	P2
B	62	P2
C	38	P2
D	80	P1
E	185	P2
F	296	P2
G	92	P2
H	47	P2
I	494	P1
J	273	P1
K	125	P1
L	37	P2
M	296	P2
N	185	P2
O	45	P2
P	489	P1
Q	140	P2
R	140	P2
S	140	P2
T	56	P2
U	132	P1


Totals (SF)	
Paint 1	1,594.6
Paint 2	1,815.0

Drawing Key

Fascia	Corner Trim	Door Trim	Window Trim	Paint 1	Paint 3
Garage Trim	Misc Trim	Railing	Shutter	Paint 2	Paint 4


East Elevation Analysis - Structure 1
Advantage Offices

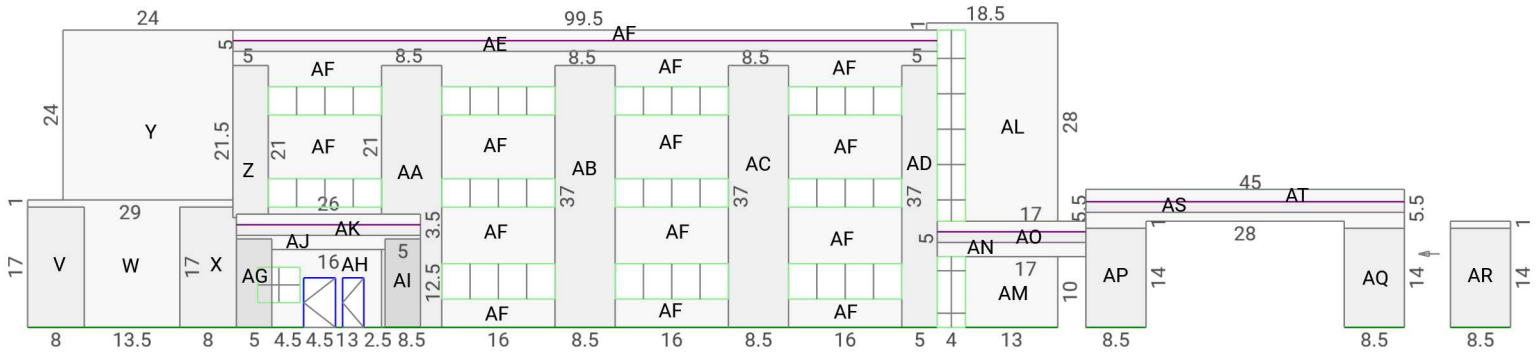


24
99.5
18.5
AF
AE
AF
AF
AF

South Elevation Analysis - Structure 1
Advantage Offices



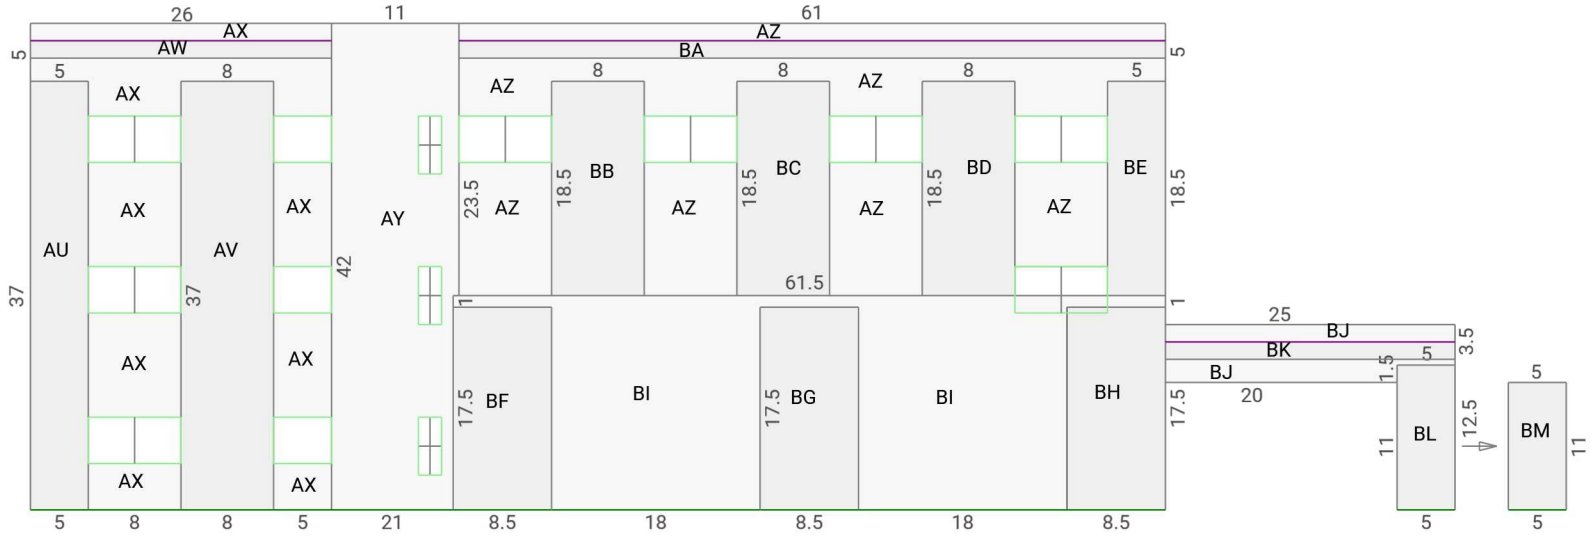

Plane	Area(sf)	Type
AU	185	P2
AV	296	P2
AW	39	P2
AX	416	P1
AY	423	P1
AZ	657	P1
BA	92	P2
BB	148	P2
BC	148	P2
BD	148	P2
BE	93	P2
BF	149	P2
BG	149	P2
BH	149	P2
BI	692	P1
BJ	80	P1
BK	38	P2
BL	62	P2
BM	55	P2


Totals (SF)	
Paint 1	2,267.7
Paint 2	1,749.3

Drawing Key

Fascia	Corner Trim	Door Trim	Window Trim	Paint 1	Paint 3
Garage Trim	Misc Trim	Railing	Shutter	Paint 2	Paint 4

West Elevation Analysis - Structure 1
Advantage Offices



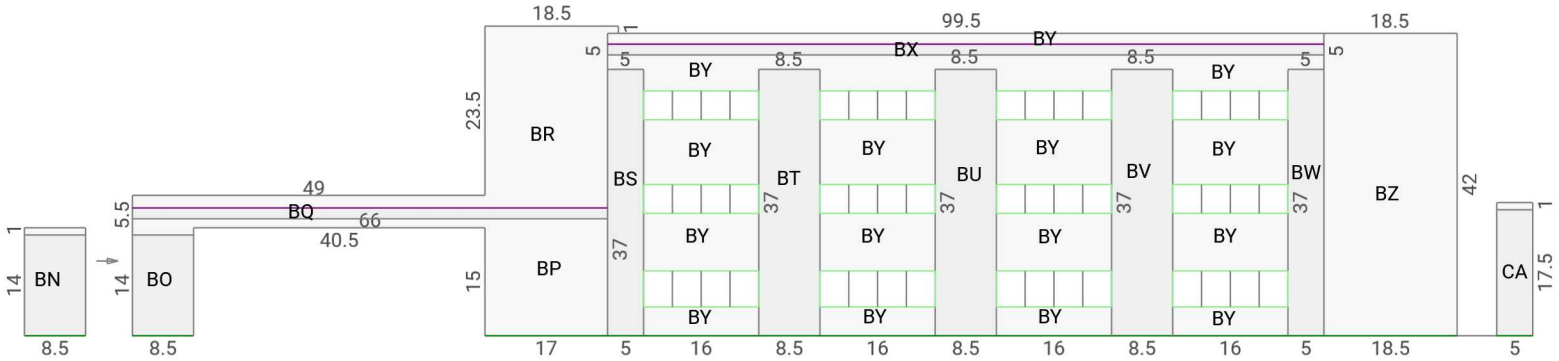

Plane	Area(sf)	Type
BN	119	P2
BO	119	P2
BP	355	P1
BQ	99	P2
BR	517	P1
BS	185	P2
BT	315	P2
BU	315	P2
BV	315	P2
BW	185	P2
BX	149	P2
BY	1,884	P1
BZ	782	P1
CA	88	P2

Totals (SF)	
Paint 1	3,538.5
Paint 2	1,887.3

Drawing Key

Fascia	Corner Trim	Door Trim	Window Trim	Paint 1	Paint 3
Garage Trim	Misc Trim	Railing	Shutter	Paint 2	Paint 4